


## Product sheet



Art.Nr. **LU222/DALI**





1m	5519,114931lx	191,30cm
2m	1380,28731lx	382,59cm
3m	613,2,12771lx	573,89cm
4m	344,9,718,31lx	765,18cm
5m	220,7,459,71lx	956,48cm
6m	153,3,319,31lx	1147,77cm
7m	112,6,234,61lx	1339,07cm
8m	86,23,179,61lx	1530,36cm
9m	68,13,141,91lx	1721,66cm
10m	55,19,114,91lx	1912,95cm

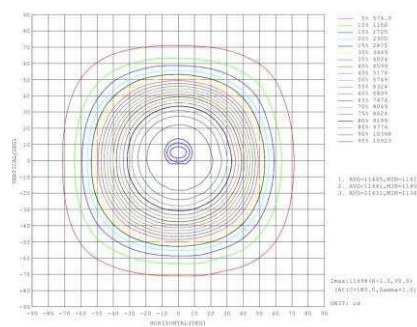

- 150W
- AC100 - 277V
- IP65
- IK08
- PF > 0,96
- 22 500Lm
- Dimension  $\varnothing 340 \times 142$  mm
- 5000K – neutral white
- D
- 90°
- 50 000h
- Warranty 5 years (SOSEN DRIVER, HONGLI LED)
- Recommended ambient temperature -30° to +55°C
- Metal-black
- Dimmable DALI
- Weight netto - 3240g
- Packing 1/4



Art.Nr. **LU222/DALI**

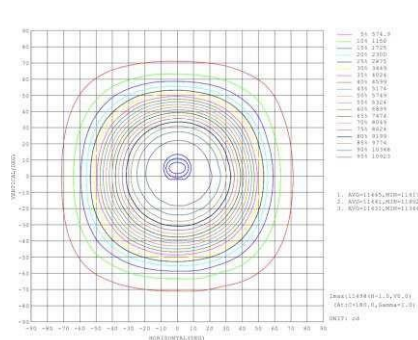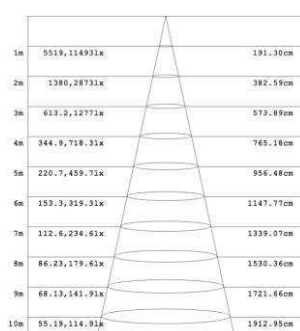

- 150W
- AC100 - 277V
- IP65
- IK08
- PF > 0,96
- 22 500Lm
- Rozmer Ø340 x 142 mm
- 5000K – neutrálna biela
- D
- 90°
- 50 000h
- Záruka 5 rokov (SOSEN DRIVER, HONGLI LED)
- Doporučená teplota okolia -30° až +55°C
- Metal-čierna
- Stmievateľné DALI
- Hmotnosť netto - 3240g
- Balenie 1/4


<https://nedes.sk/led-svietidlo-ufo-150w/ip65/5000k/dali-lu222/dali/p371>



Art.Nr. **LU222/DALI**



1m	5519,114931lx	191,30cm
2m	1380,28731lx	382,59cm
3m	613,2,12771lx	573,49cm
4m	344,9,718,31lx	765,19cm
5m	220,7,459,71lx	956,48cm
6m	153,3,319,31lx	1147,77cm
7m	112,6,234,61lx	1339,07cm
8m	86,23,179,61lx	1530,36cm
9m	68,13,141,91lx	1721,66cm
10m	55,19,114,91lx	1912,95cm

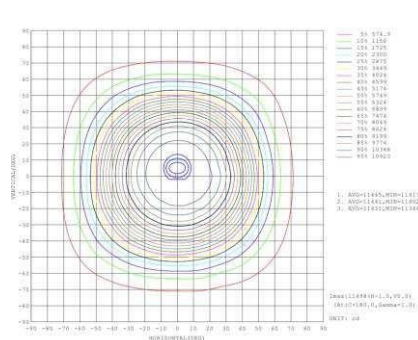

- 150W
- AC100 - 277V
- IP65
- IK08
- PF > 0,96
- 22 500Lm
- Rozměr Ø340 x 142 mm
- 5000K- neutrální bílá
- D
- 90°
- 50000h
- Záruka 5 let (SOSEN DRIVER, HONGLI LED)
- Doporučená teplota okolí -30° až +55°C
- Metal-černá
- Stmívatelné DALI
- Hmotnost netto - 3240g
- Balení 1/4

<https://nedes.cz/led-svitidlo-ufo-150w/ip65/5000k/dali-lu222/dali/p-371>


## Termék adatlap



Art.Nr. **LU222/DALI**



1m	5519,114931lx	191,30cm
2m	1380,28731lx	382,59cm
3m	613,2,12771lx	573,89cm
4m	344,9,718,31lx	765,18cm
5m	220,7,459,71lx	956,48cm
6m	153,3,319,31lx	1147,77cm
7m	112,6,234,61lx	1339,07cm
8m	86,23,179,61lx	1530,36cm
9m	68,13,141,91lx	1721,66cm
10m	55,19,114,91lx	1912,95cm

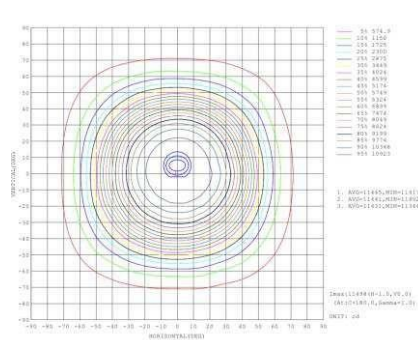


- 150W
- AC100 - 277V
- IP65
- IK08
- PF > 0,96
- 22 500Lm
- Méret  $\varnothing$ 340 x 142 mm
- 5000K - természetes fehér
- D
- 90°
- 50000h
- 5 év garancia (SOSEN DRIVER, HONGLI LED)
- Ajánlott környezeti hőmérséklet 30° és +55°C
- Metal-fekete
- Dimmelhető DALI
- Nettó tömeg - 3240g
- Csomagolás 1/4



Art.Nr. **LU222/DALI**



1m	5519,114931lx	191,30cm
2m	1380,28731lx	382,59cm
3m	613,2,12771lx	573,89cm
4m	344,9,718,31lx	765,18cm
5m	220,7,459,71lx	956,48cm
6m	153,3,319,31lx	1147,77cm
7m	112,6,234,61lx	1339,07cm
8m	86,23,179,61lx	1530,36cm
9m	68,13,141,91lx	1721,66cm
10m	55,19,114,91lx	1912,95cm

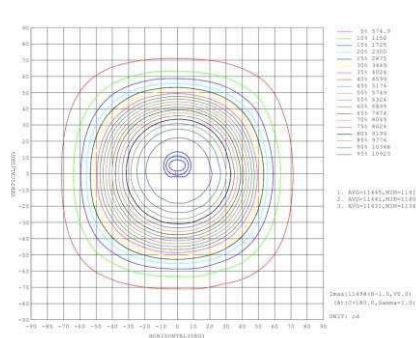

- 150W
- AC100 - 277V
- IP65
- IK08
- PF > 0,96
- 22 500Lm
- Dimension Ø340 x 142 mm
- 5000K - Neutralweiß
- D
- 90°
- 50 000St
- Garantiezeit 5 Jahre (SOSEN DRIVER, HONGLI LED)
- Empfohlene Umgebungstemperatur -30° bis +55°C
- Metall-Schwarz
- Dimmbar DALI
- Nettogewicht - 3240g
- Balenie 1/4